

SEH(G)

10.1 x 3.1 x 3.1 mm (4012)

Perfectly suited for a wide range of battery protection boards



Agency Approvals

Agency	Ampere Rating
Recognized Component for Canada and US	20A - 30A
TUV	20A - 30A

Interrupting Rating

20A:	100 amperes at 125V AC 300 amperes at 100V DC
25A - 30A:	100 amperes at 100V DC 100 amperes at 125V AC


Product Characteristics

Operating Temperature	-55 °C to 125 °C
Material	Body: Ceramic Termination: Gold Plated Brass Caps

Packaging

Packaging Option	Quantity
On Tape	2,500 pcs / reel

Mechanical Dimensions (mm)

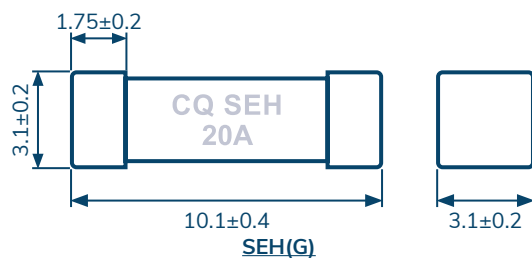

Electrical Characteristics

Ampere Rating	Opening Time	
	1 In	2 In
	MIN	MAX
20A - 30A	4 hr	60 sec

Catalog Number	Ampere Rating (A)	Voltage Rating (V)	Nominal Cold Resistance (Ohms)	Nominal Melting I ² t (A ² sec.)
SEH 020	20A	125V	0.0033	18.000
SEH 025	25A		0.0022	45.000
SEH 030	30A		0.0016	101.00